



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

14 GPM: D14MZ10

Product Specifications


855.myCG.com

Dilution Range:	1:100 to 1:10 (1% to 10%)
Water Flow Range:	0.05 to 14 GPM
Operating Pressure Range:	7 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none"> • Polypropylene (Standard Blue) • PVDF
Other Options:	Viscous
Dimensions:	19 1/8" x 6 5/16"
Weight:	6 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6ft, 5/8" suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	IPK34, Bypass - part #: MPDI196



Recommended Installation

IPK34 - 14 GPM Industrial Plumbing Kit

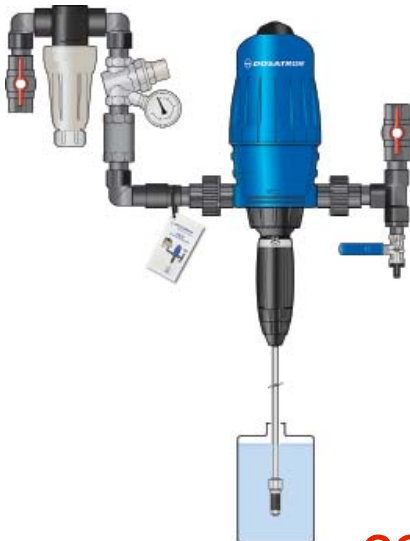

- 3/4" schedule 80 PVC ball valve
- 1/2" stainless steel ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" 14 GPM flow restrictor
- 3/4" polypropylene check valve
- 3/4" union
- 3/4" x 2" schedule 80 PVC fittings
- 1/2" x 2" schedule 80 PVC fitting
- 1/2" x 1/2" barb fitting
- 3/4" male to 1/2" female reducer bushing
- 3/4" T
- 3/4" street elbows
- Roll of Teflon tape
- Instruction card
- Zip tie

coolantguy.com

855.692.4266